

# 2018 - 2019 Mercedes-Benz GLC 350 - Towing

## Permitted Towing Methods

**Towing with a raised axle:** towing should be performed by a towing company.

### Vehicles with rear wheel drive

#### Permitted towing methods

Both axles on the ground	Yes, for a maximum of 31 miles (50 km) at 31 mph (50 km/h)
Front axle raised	No
Rear axle raised	Yes, if the steering wheel is fixed in the center position with a steering wheel lock

### 4MATIC vehicles

#### Permitted towing methods


Both axles on the ground	Yes, for a maximum of 31 miles (50 km) at 31 mph (50 km/h)
Front axle raised	No
Rear axle raised	No

NOTE: We offer these best practices as a courtesy. Network participants remain solely responsible for the appropriate training and management of their personnel, following any and all industry standards for safety, and ongoing compliance with all local, state, federal laws, rules and regulations.

# Mercedes-Benz GLC 350 - Towing

2018 - 2025

## Tow Eye Location

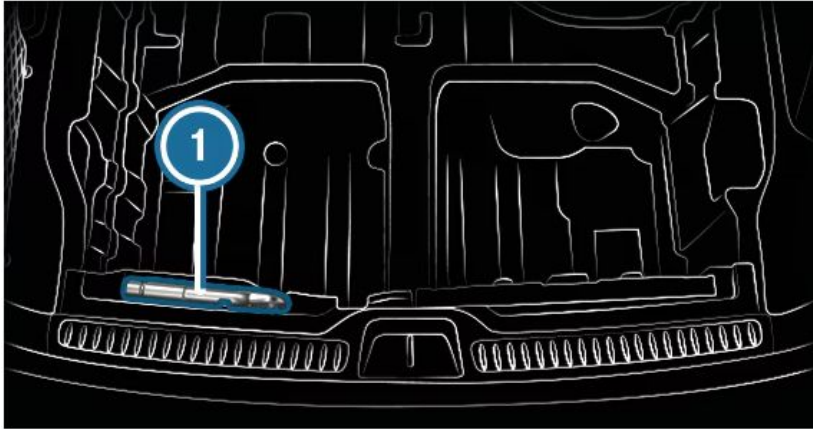


- The towing eye ① is located under the cargo floor in the loading sill.

## Using a Tow Eye

Press the mark on cover (1) inwards and remove

Screw in the towing eye **clockwise** as far as it will go and tighten

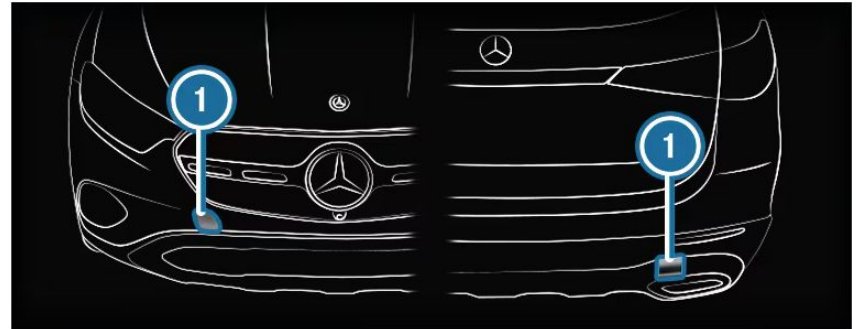

NOTE: We offer these best practices as a courtesy. Network participants remain solely responsible for the appropriate training and management of their personnel, following any and all industry standards for safety, and ongoing compliance with all local, state, federal laws, rules and regulations.