

2021 Ram Promaster

Gear Selector Override - 6-Speed Transmission




If a malfunction occurs and the gear selector cannot be moved out of the PARK (P) position, you can use the following procedure to temporarily move the gear selector:

- 1 Turn the engine OFF.
- 2 Firmly apply the parking brake.
- 3 Using a small screwdriver or similar tool, remove the gear selector override access cover which is located below the gear selector.



Gear Selector Release Cover

- 4 Press and maintain firm pressure on the brake pedal.
- 5 Insert the screwdriver or similar tool into the access port, and push and hold the override release lever forward.

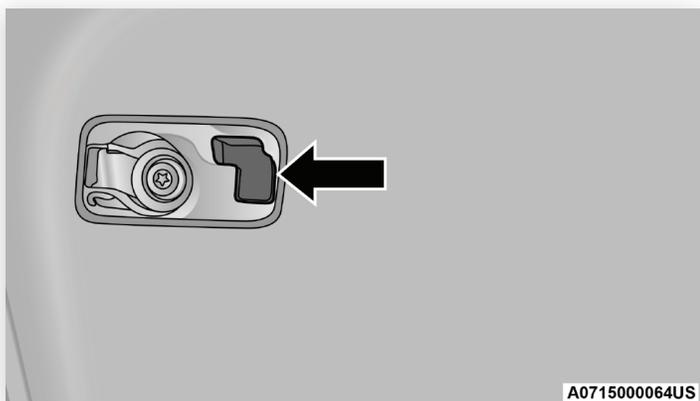

Release Lever

- 6 Move the gear selector to the NEUTRAL (N) position.
- 7 The vehicle may then be started in NEUTRAL.
- 8 Reinstall the gear selector override access cover.